

LKS

Elettropompe sommergibili in PVC Water Submersible Pumps

Applicazione

• Elettropompa leggera e maneggevole, la sua affidabilità è garantita da una doppia protezione contro infiltrazioni, ottenuta con tenuta meccanica e guarnizione. Tutti i componenti delle elettropompe LKS sono stati realizzati seguendo le direttive WEE, ROHS, PAHS, che ne garantiscono la totale sicurezza

UTILIZZO

- Temperatura del liquido fino a: +35° C.
- Temperatura ambiente fino a: 40° C.

DATI TECNICI

- Alimentazione 230-240V/50Hz
- Uscita 1 1/4"
- Cavo H05RN-F 10mt
- Classe di protezione: IPX8
- Massima profondità di immersione: 7 mt

Application

• It is mainly used for water drainage in the pond, miniature landscape, bathing, domestic cultivation and solar water supply place etc. It can also be used for small equipment and water supply system for facilities.

OPERATING LIMITS

- Fluid temperature up to 35° C.
- Ambient temperature up to 40° C.

TECHNICAL DATA

- Supply power 220-240V/50Hz
- Outlet 1 1/4"
- Cable H05RN-F 10m
- Protection class: IPX8
- Max immersion depth: 7 mt



Per acqua pulita | Clean Water



COMBINATA
Dirty & Clean Water

Piede richiudibile che permette di trasformare la pompa da acque cariche ad acque chiare.

Folding foot that allows to transform the sewage pump to clear water.


GIRANTE VORTEX

Dati tecnici | Technical Data

Mod. Acqua pulita Mod. Clean Water	Alimentazione Supply power	Potenza Power		Prevalenza max. Max. head	Portata max. Max. flow	Max diam particelle Max. dia. of particle	Uscita Outlet	Cavo Cable	Codice Code	€ cad € each
		kW	HP							
LKS256P	220-240V/50Hz	0.25	0.33	6mt	7m³/h	5mm	1 1/4"	H05RN-F 10mt	10LKS256P	88,00
LKS756P	220-240V/50Hz	0.75	1.00	9mt	14m³/h	5mm	1 1/4"	H05RN-F 10mt	10LKS756P	96,00
Mod. Acqua Carica Mod. Dirty Water	Alimentazione Supply power	Potenza Power		Prevalenza max. Max. head	Portata max. Max. flow	Max diam particelle Max. dia. of particle	Uscita Outlet	Cavo Cable	Codice Code	€ cad € each
		kW	HP							
LKS406PD	220-240V/50Hz	0.40	0.60	5mt	9m³/h	30mm	1 1/4"	H05RN-F 10mt	10LKS406PD	96,00
LKS756PD	220-240V/50Hz	0.75	1.00	8mt	14m³/h	30mm	1 1/4"	H05RN-F 10mt	10LKS756PD	102,00

Dimensioni | Dimension

Modello Model	L (mm)	W (mm)	H (mm)
LKS256P	174	159	256
LKS756P	174	159	287
LKS406PD	174	159	292/327
LKS756PD	174	159	323/358

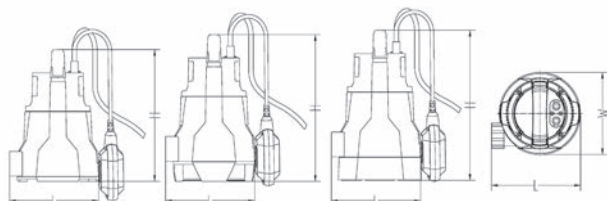

Dimensioni imballo | Package information

Modello Model	GW (Kg)	L (mm)	W (mm)	H (mm)
LKS256P	4.1	210	165	300
LKS756P	5.4	210	165	300
LKS406PD	4.5	210	165	330
LKS756PD	5.5	210	165	330

